This Page is Inserted by IFW Indexing and Scanning Operations and is not part of the Official Record

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

efects in the images include but are not limited to the items checked	
☐ BLACK BORDERS	
☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES	· .
☐ FADED TEXT OR DRAWING	
☐ BLURRED OR ILLEGIBLE TEXT OR DRAWING	
☐ SKEWED/SLANTED IMAGES	•
COLOR OR BLACK AND WHITE PHOTOGRAPHS	
GRAY SCALE DOCUMENTS	
☐ LINES OR MARKS ON ORIGINAL DOCUMENT	
☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY	
OTHER:	

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.

This Page Blank (uspto)



WORLD INTELLECTU

INTERNATIONAL APPLICATION PUBLISHED

(51) International Patent Classification 6: G06F 9/46

(43) International Publication Date:

8 February 1996 (08.02.96)

(21) International Application Number:

PCT/GB95/01705

(22) International Filing Date:

19 July 1995 (19.07.95)

(30) Priority Data:

9414951.5

25 July 1994 (25.07.94)

GB

(71) Applicant (for all designated States except US): BRITISH TELECOMMUNICATIONS PUBLIC LIMITED COM-PANY [GB/GB]; 81 Newgate Street, London EC1A 7AJ (GB).


(72) Inventors; and

- (75) Inventors/Applicants (for US only): BUTT, John [GB/GB]; 212 Ashcroft Road, Ipswich, Suffolk IP1 6AF (GB). IRE-LAND, Paul, Smart [GB/GB]; 28 Richardsons Road, East Beryholt, Colchester, Essex C07 6RR (GB).
- (74) Agent: EVERSHED, Michael; BT Group Legal Services. Intellectual Property Dept., 13th floor, 151 Gower Street, London WCIE 6BA (GB).

(81) Designated States: AM, AU, BB, BG, BR, BY, CA, CN, CZ, EE, FI, GB, GE, HU, IS, JP, KE, KG, KP, KR, KZ, LK, LR, LT, LV, MD, MG, MN, MW, MX, NO, NZ, PL, RO, RU, SD, SG, SI, SK, TJ, TM, TT, UA, UG, US, UZ, VN. European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG), ARIPO patent (KE, MW, SD, SZ, UG).

Published

With international search report.




AUG 1.7 1999

FINNEGAN, HEMDERSON, FARABOW, GARRETT & DUNNER, LLP.

(54) Title: COMPUTER SYSTEM HAVING CLIENT-SERVER ARCHITECTURE

(57) Abstract

A network manager for a telecommunications network has a client-server architecture. The software components of the network manager include a set of clients (50) which form part of the application programs of the network manager, a user interface (32), a database (36) containing details of the network and a communications stack (38) for communicating with exchanges managed by the network manager. The clients (50) generate requests to run jobs on servers (52) and (54). The jobs which are run on server (52) are eventually destined for a resource in the form of a database (36), while the jobs which are run on servers (54) are eventually destined for resources in the form of exchanges. The requests are initially passed to software module JBM. This module then checks if the resource for which the job is destined is free and, if not, puts the job on a holding queue. If the resource is free, it checks whether the job is scheduled for immediate execution or execution at a future time. If it is scheduled for execution at a future time, it is put on a queue of scheduled jobs. If the job is scheduled for immediate execution, the module JBM checks if a server is free to accept the job. If no server is free, the job is put on a queue of jobs awaiting immediate execution. If the server is free, the module JBM instructs a module SMAN to load the job onto the free server.

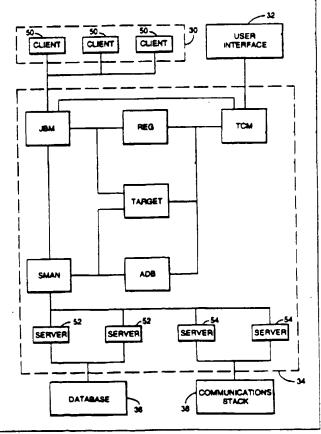

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

	•	GB	United Kingdom	MR	Mauritania
AT	Austria	GE	Georgia	MW	Malewi
ΑÜ	Australia	GN	Guinea	NE	Niger
88	Barbados	GR	Greece	NL	Netherlanda
BE	Belgium	HU	Hungary	NO	Norway
BF	Burkina Faso	IE.	Ireland	NZ	New Zealand
BG	Bulgaria			PL	Poland
BJ	Benin	IT.	Italy	PT	Portugal
BR	Brazil	JP	Japan	RO	Romania
BY	Beiarus	KE	Kenya	RU	Russian Federation
CA	Canada	KG	Kyrgystan	SD	Sudan
CF	Central African Republic	KP	Democratic People's Republic	SE	Sweden
CG	Congo		of Kores		
CH	Switzerland	KR	Republic of Korea	SI	Slovenia
CI	Côte d'Ivoire	ΚŻ	Kazakhstan	SK	Slovakia
CM	Cameroon	u	Liechtenstein	SN	Senegal
CN	China	LK	Sri Lanka	TD	Ched
cs	Czechoslovskia	LU	Luxembourg	TG	Togo
CZ.	Czech Republic	LV	Larvia	ŢĴ	Tajikistan
DE	Germany	MC	Monaco	IΤ	Trinidad and Tobego
	Denmark	MD	Republic of Moldova	UA	Ulcraine
OK		MG	Madaguscar	US	United States of Americs
ES	Spain	ML	Mali	UZ	Uzbekisten
Ħ	Finland	MN	Mongolia	VN	Viet Nam
FR	France	. (4814			
GA	Gabon				

WO 96/03692 PCT/GB95/01705

COMPUTER SYSTEM HAVING CLIENT-SERVER ARCHITECTURE

This invention relates to a computer system having a client-server architecture and also to a method of operating 5 a computer system having this architecture.

A computer system having a client-server architecture comprises a set of software modules known as clients and a further set of software modules, known as servers, for serving requests from the clients to run jobs. This type of architecture enables jobs from the clients to be distributed among the servers. The servers may be of similar or differing types. With this type of architecture, it is desirable to provide a mechanism for controlling the scheduling of requests by the clients to run jobs on the servers.

According to one aspect of this invention there is having a client-server computer system architecture, said system comprising: a set of clients; a set of servers for serving requests from the clients to run jobs; 20 means for managing requests from the clients to run jobs on servers; and means for loading jobs on to servers; said request managing means being arranged to receive requests from the clients and, on receiving a request, to perform the following operations: check if a server is free to run the 25 job; if a server is not free, put the job on a queue for jobs each of which is ready for execution when a server becomes free; and when a server is free to run a job, instructing said job loading means to load a job on to the server.

The provision of a queue for jobs each of which is ready for execution when a server becomes free enables the computer system to deal with the situation where clients are requesting jobs to be run on servers at a time when a server is not free to run the jobs.

According to a second aspect of this invention there
35 is provided a computer system having a client-server
architecture, said computer system comprising: a set of
clients; a set of servers for serving requests from the

clients to run jobs; means for managing requests from clients to run jobs on servers; and means for loading jobs on to servers; said request managing means being arranged to receive requests from the clients and, on receiving a request from a client to run a job which is destined for a resource accessed by a server, to perform the following operations; check is the resource is free to run the job; and if the resource is not free, put the job on a queue for jobs each of which is waiting for a resource to become free.

According to a third aspect of this invention there is provided a method of operating a computer system having client-server architecture, said computer system comprisin a set of clients and a set of servers for serving request from the clients to run jobs, for each request made by client to run a job on a server, said method comprising the steps of:

checking if a server is free to run the job; and
if a server is not free to run the job, putting th
job on a queue for jobs each of which is ready for executic
when a server becomes and

when a server is free to run the job, loading a job c to the server.

According to a fourth aspect of this invention ther
is provided a method of operating a computer system having
client-server architecture, said computer system having a se
of clients and a set of servers for serving requests from the
clients to run jobs; for each request made by a client to ru
a job on a resource accessed by a server, said methor
including the steps of: checking if the resource is free t
run the job; and, if the resource is not free, putting the
job on a queue for jobs each of which is waiting for
resource to become free.

This invention will now be described in more detail by way of example, with reference to the drawings in which figure 1 is a block diagram of a network manager a associated element managers and local exchanges, the network manager including a computer system embodying this inventic

Figure 2 is a block diagram of the main software components of the network manager of Figure 1;

Figure 3 is a block diagram showing the individual modules which form the transaction processing component of the network manager of Figure 1 together with its relationship to the other software components;

each of Figures 4 to 6 is a flow chart illustrating the operation of one of the modules of the transaction processing component;

10 Figure 7 is a block diagram of set of computers which together form a computer system having a client-server architecture; and

Figure 8 is a block diagram of the hardware components of the network manager shown in Figure 1.

Referring now to Figure 1, there are shown three local exchanges 10, 12, 14 which form part of a public telecommunications network. Although not shown in Figure 1, the local exchanges are connected to trunk exchanges and the trunk exchanges are all fully interconnected to each other.

The local exchanges 10, 12, 14 are managed, respectively, by element managers 16, 18, 20. The three element managers 16, 18, 20 are managed by a network manager 22. Although not shown in Figure 1, each of the remaining exchanges of the network is managed by a respective individual element

25 manager. The element managers are managed by further network managers, not shown.

Because of the complexity of an exchange, each exchange is provided with an individual element manager. By way of modification, the exchanges may be managed directly by the network manager 22 without the intermediate use of element managers. Element managers are also provided for the other elements of the network, such as multiplexers, and each of these element managers manages typically many individual elements. These further element managers are managed by one or more further network managers, not shown.

The network manager 22 sends instructions to the element managers for configuring the exchanges managed by

them. The instructions sent to each element manager car include instructions to connect or disconnect customers from the local exchange as well as instructions for handling calls by that exchange. The element managers also receive data from the exchanges which they manage regarding their operating state and pass this data to the network manager 22. The network manager 22 has a database in which is stored data relating to the state of the exchanges.

The general arrangement of network manager 22, elemen 10 managers and exchanges managed by the element managers as described above with reference to Figure 1 is well known t By way of example, the loca those skilled in the art. exchanges 10, 12, 14 may be System X exchanges manufacture by GEC Plessey Telecommunications plc. The network manage 15 22 is implemented as a computer. The main hardware component of the computer which implements the network manager 22 ar These comprise storage 60, a centra shown in Figure 8. processing unit (CPU) 62, a visual display unit (VDU) 64, keyboard 66 and input/output ports 68. The storage 6 20 comprises hard disc memory, random-access-memory (RAM) an The software which controls th read-only-memory (ROM). computer is stored in storage 60. The software includes client-server architecture embodying this invention. software of the network manager 22 will now be described i 25 more detail with special reference to the client-serv€ architecture.

Referring now to Figure 2, there are shown the mai software components of the network manager 22. Thes comprise a set of application programs 30, a user interfaction 32, a transaction processing component 34, a database 36 are a communications stack 38. Although not shown, the components also include the operating system for the compute which implements the network manager 22.

The application programs 30 are the programs which a:

responsible for sending instructions to the element manage
and receiving data from them. The construction of su
programs for a network manager is generally well known

those skilled in the art. The user interface 32 is the software component which permits the user to access the network manager and the construction of user interfaces is also generally well known to those skilled in the art.

The database 36 is the database mentioned above which contains data relating to the operational state of the exchanges. By way of example, the database 36 may be the well known ORACLE database management system. The communications stack 38 is responsible for converting both outgoing and incoming messages between the form used by the network manager 22 and the form which is suitable for transmission along the communication links which connect the network manager 22 and the various element managers. The construction of communications stacks is generally well known to those in the art and it is now usual for a communications stack to be provided as a standard component of the operating system of a computer.

The application programs 30 generate requests for both the database 36 and the communications stack 38 to perform jobs. In the case of the database 36, the jobs take the form of either requests to enter data into the database 36 or to retrieve data from it. In the case of the communications stack 38, the jobs take the form of requests to send messages to the element managers. The transaction processing component 34 is responsible for scheduling the jobs and this component will now be described in more detail with reference to Figure 3.

Referring now to Figure 3, there are shown the individual software modules which form the transaction processing component 34 together with the relationship of these modules to the other software components of the network manager 22. These other components comprise the user interface 32, the database 36, the communications stack 38 and a set of client modules 50. In Figure 3, for reasons of simplicity, there are shown only three client modules 50 but, in practice, there would be a much larger number of these modules. In the present example, each of the client modules

50 is one of the application programs 30. By way of modification, the client modules could form part of the transaction processing component 34 and serve the function of interfacing to the individual application programs.

The transaction processing component 34 comprises software modules JBM, SMAN, REG, TARGET, ADB and TCM. shown in Figure 3, the transaction processing component 3. also has two servers 52 for accessing the database 36 and two servers 54 for accessing the communications stack 38. Thus, 10 the servers 52 provide an interface to the database 36 and the servers 54 provide an interface to the communication stack 38. Thus, a request to run a job on one of the server 52 also represents a request to run the job on the databas The communications stack 38 is part of an interface t 15 the element managers 16, 18, 20 and, as will be recalled these element managers manage the local exchanges 10, 12, 14 Thus, a request to run a job on one of the servers 5 represents, ultimately, a request to run the job on one c Thus, database 36 and the loca the local exchanges. 20 exchanges 10, 12, 14 represent resources accessed by th servers. The servers 52 belong to a first type of server an the servers 54 belong to a second type of server. reasons of simplicity, only two servers are shown of eac type but, in practice, there will be more than two servers (25 each type.

The general function of each of the software module which form the transaction process in component 34 will not be outlined and this will be followed by a detailed description of each of these modules.

The module JBM is responsible for the management (
each request received from one of the clients 50. The modu.

JBM checks each request to see if the job can be execut

immediately. If it cannot be executed immediately, it
placed on a queue. If a job can be executed immediately,

35 is passed to the module SMAN which loads it on to a serve The module REG keeps a list of clients which have register with the transaction processing component 34 and from whi

requests can be accepted. The module TARGET keeps account of the number of jobs running on each of the resources accessed by the servers 52, 54. The module ADB maintains details of each executed job. The module TCM provides the user with access to the modules JBM, REG, TARGET and ADB

In more detail, the module JBM receives the requests to run jobs from the servers 50. The steps for processing each job request in the module JBM will now be described with reference to Figure 4.

On receiving a request to run a job from a client, in a step S10 a check is made with the module REG to determine if the client is registered with the transaction processing component 34. The purpose of this step is to prevent jobs being run which are received by accident from clients which are not registered. If the client is not registered, processing of the job is terminated. If the client is registered, in a step S11, a check is made with the module TARGET to determine if the resource for which the job is destined is free. If the resource is not free, in a step S12, the job is placed on a queue (the holding queue) of jobs which are waiting for a resource to become free.

Some jobs are scheduled for execution at a later time. If it is found in step S11 that the resource is free, in a step S12 a check is made to determine if the job is scheduled for execution at a later time. If the job is scheduled for execution at a later time, in a step S13 it is placed on a queue (the queue of scheduled jobs) for jobs which are scheduled for execution at a later time.

If in step S12 it is found that the job is ready for immediate execution, in a step S13 a check is made with the module SMAN to determine if a server is free to run the job. For each of the two types of server, the module JBM has a queue (a ready queue) of jobs which are waiting for a server to become free. If in step S13 it is found that a server is not free to run the job, then in a step S14 the job is placed on an appropriate one of the two ready queues. If in step S13 it is found that a server is free to run the job, in a

step S15, the module JBM instructs the module SMAN to loa the job on to the server.

As will be explained below with reference to the module SMAN, when a job has been run on a server, it is unloaded from the server by the module SMAN and this module then informs the module JBM. The module JBM then de-queue a job from the appropriate ready queue in accordance with predefined criterion and instructs the module SMAN to load is on to the free server. The module SMAN has four predefined criteria for selecting the next job to be loaded onto a free server. By using the module TCM, the user can select, for each type of server, the particular predefined criterion be used. These four predefined criteria will now described.

The first predefined criterion is simply that the ne job in the appropriate ready queue is selected as the ne job to be loaded onto the free server.

The second predefined criterion is that the next j in the appropriate ready queue for the same resource as t 20 previous job is selected as the next job to be loaded on the free server. Thus, if the previous job was destined f local exchange 10, the module JBM selects the next job in t appropriate ready queue for the local exchange 10 as the ne job to be loaded onto the free server. If there is no job the appropriate ready queue for the same resource as t previous job, the next job in the ready queue is selected the new job.

The third criterion is that the next job of the satype, regardless of the resource for which it is destined,

the appropriate ready queue is selected as the next job to loaded onto the free server. Thus, if the previous job to connect a new customer to a local exchange, the module selects the next job for connecting a new customer to a loexchange as the next job to be loaded onto the free serv.

If there is no job in the ready queue of the same type as previous job, the next job in the ready queue is selected the next job to be loaded onto the free server.

The fourth predefined criterion is that the next job in the appropriate ready queue of the same type and destined for the same resource as the previous job is selected as the next job to be loaded onto the free server. If there is no job in the ready queue of the same type and destined for the same resource as the previous job, then the next job which is destined for the same resource as the previous job is selected as the next job to be loaded onto the free server. If there is no job in the ready queue destined for the same resource as the previous job, then the next job in the ready queue is selected as the next job to be loaded onto the free server.

In the queue of scheduled jobs, the jobs are arranged in order by their scheduled times of execution. For the job which is scheduled to be executed next, a timer is established. At the time at which the job should be scheduled, further processing of the job commences at step \$13.

As will also be explained below, when a resource 20 becomes free, the module TARGET informs the module JBM. The module JBM then removes the next job from the holding queue which is destined for the resource which has become free and processing of this job recommences with step S12.

The module JBM receives requests to run two types of jobs. In the first type of jobs (attached jobs), the client and server are connected together while the job is being run on the server. In the second type of jobs (detached jobs), the client and server are not connected while the job is run. Detached jobs have the advantage that they can be run without occupying the client. When the module JBM receives a request to run a detached job, the details of the job are stored and then retrieved when the job is unloaded from a server.

Referring now to Figure 5, there are shown the steps which are performed by the module SMAN on receiving a request from the module JBM to load a job on to a server. After receiving a request to load a job on to a server, in a step \$20, the module SMAN loads the job on to a free server.

Then, in a step S21, it waits for notification from the server that the job has been completed. When it receive notification that the job has been completed, in a step S22 it unloads a job from the server. In the case of an attache 5 job, the job is unloaded by breaking the connection betwee the client and the server. In the case of a detached job the job is unloaded by transmitting the results of the job t the client from which the request came. Then, in a step S22 the module SMAN notifies the module JBM that the job has be ϵ 10 completed and that the server has become free. In a ste S24, the module SMAN notifies the module TARGET that the j \langle has been completed. The module TARGET uses this data to kee count of the number of jobs which are being run on the relevant resource. Finally, in a step S25, the module SM 15 notifies the module ADB that the job has been complet-The module ADB us together with the details of the job. this data to provide a log of completed jobs.

The module SMAN is also arranged to create and dele servers. For each type of server, the module SMAN maintai 20 a table of the existing servers of that type together with table containing the number jobs waiting in the ready que for execution on that type of server. The module SMAN arranged to maintain the number of servers of each type at optimum level for the number of jobs which are awaiti 25 execution. The procedure for achieving this for each rea queue in shown in Figure 6. In a step S30, the number jobs on the ready queue is compared with the number servers for serving jobs on that queue. Using a criteri pre-set by the user, the comparison is used to establish 30 servers should be created or deleted so as to achieve optimum number of servers. For example, the criterion co be that the ratio of the number of jobs in the ready queue the number of servers should be kept at a certain val Then, in a step S31, servers are created or deleted 35 appropriate.

As will be explained below, the user is able instruct the module SMAN to create and delete servers.

The module REG maintains a list of clients which are registered with the transaction processing component 34. By using the module TCM, the user can add and delete clients and inspect the list. As explained above, the list of clients is accessed by the module JBM each time it receives a request to run a job from one of the clients.

For any resource, the number of jobs which can be run at any one time efficiently is limited. The database 36 is able to handle a relatively large number of jobs 10 simultaneously. In contrast, as the main function of the local exchanges 12, 12, 14 is to process telecommunication calls, the amount of computing capacity to run jobs requested by the network manager 22 is limited and only a few of such jobs can be run simultaneously.

15 The function of the module TARGET is to keep a count of the number of jobs which are running on each resource and also to maintain a threshold value for the maximum number of jobs which can be run on each resource. For each resource the module TARGET maintains a list of jobs which are running 20 on it. When the module SMAN unloads a job from a server, it notifies the module TARGET which then deletes the job from the list for the appropriate resource. As explained above, when the module JBM receives a request to run a new job, it checks with the module TARGET if the resource is free to run 25 the job. The module TARGET then compares the number of jobs running on that resource with its threshold value and thus determines if the resource is free to accept a new job. the resource is free to accept a new job, the module TARGET adds the job to the list for that resource and informs the 30 module JBM that the resource can accept a new job. resource is not free to accept a new job, the module TARGET informs the module JBM of this.

By using the module TCM, the user can change the threshold value for each resource and also obtain a list of jobs presently running on each resource.

The module ADB maintains a database containing details of completed jobs. Each time a job is unloaded from a server

the module SMAN sends details of the completed job to the module ADB and the module ADB stores these details in its database. The module ADB also maintains files containing details of jobs. At the end of each day, details of the job are transferred from the database to the files following selection procedure established by the user. Thus, the database requires only limited amount of data storage capacity. By using the module TCM, the user can inspect the data in the database and in the files. Thus, the module AD enables the user to monitor the performance of the transaction processing component 34.

The module TCM provides the user with access to the modules JBM, REG, TARGET and ADB. In the case of the modul JBM, it permits the user to inspect the jobs on each queue to delete jobs from queues and to change the scheduled time of execution for jobs on the queue of scheduled jobs. In the case of the module REG, it permits the user to add and delections from the list of registered client. In the case is the module TARGET, it permits the user to inspect the jobs running on each resource and also to change the threshod value for the maximum number of jobs which can be run on each resource. In the case of the module ADB, it permits the user to inspect details of the jobs stored on both the databate and the files and also to change the selection procedure for transferring details of jobs from the database to the file

Although the transaction processing component 34 h been described with reference to a network manager, it can used in any computer system which has a client-serv architecture. Figure 7 shows a set of computers 50, 51, 30 and 53 which are connected together by a telecommunicatic network 54. As indicated by the dotted line, the number computers connected in this way can be greater. Both clien and servers can be provided in any of the computers 50 to thereby providing the client-server architecture. In or to control the scheduling of requests to run jobs between clients and servers, one of the computers, for example

computer 50, is provided with a transaction process

- 13 -

component generally similar to the transaction processing component 34 except that it does not include servers.

CLAIMS

1. A computer system having a client-server architecture said system comprising:

a set of clients;

a set of servers for serving requests from the client to run jobs;

means for managing requests from the clients to rejobs on the servers; and

means for loading jobs on to the servers;

said request managing means being arranged to receirequests from the clients and, on receiving a request, perform the following operations:

check if a server is free to run the job;

if a server is not free, put the job on a queue f jobs each of which is ready for execution when a serv becomes free; and

when a server is free to run a job, instructing sa job loading means to load a job on to that server.

20

2. A computer system as claimed in claim 1, in which, t request managing means is arranged to select the next job be loaded onto a free server in accordance with a predefin criterion.

25

- 3. A computer system as claimed in claim 1 or claim 2, which, on receiving a request to run a job, said requemanaging means is arranged to perform the addition following operations:
- on the future; and

if the job is scheduled for execution at a time in t future, put a job on a queue for jobs each of which scheduled for execution at some time in the future.

35

4. A computer system as claimed in any one of preceding claims, in which, on receiving a request to ru

15

job which is destined for a resource accessed by a server, said request managing means is arranged to perform the following additional operations:

check if the resource is free to run the job; and
if the resource is not free, put the job on a queue
for jobs each of which is waiting for a resource to become
free.

- 5. A computer system as claimed in claim 4, including a database for maintaining data on jobs running on the or each resource which is accessed by a server, for the or each resource said database keeping a count of the number of jobs being run on the resource and a threshold value for the number of jobs which can be run on that resource.
 - 6. A computer system as claimed in claim 5, in which, said request managing means accesses said database in order to check if a resource is free to run on a job.
- 20 7. A computer system as claimed in claim 5 or claim 6, including means for permitting a user of the computer system to set the threshold value for the or each resource.
- 8. A computer system as claimed in any one of the preceding claims, further including means for creating and deleting servers, said server creating and deleting means being arranged to compare the number of jobs on the queue of jobs ready for execution with the number of servers for serving the jobs, and to create or delete servers in accordance with the result of the comparison.
 - 9. A computer system having a client-server architecture, said computer system comprising:
 - a set of clients;
- a set of servers for serving requests from the clients to run jobs;

means for managing requests from clients to run jobs in servers; and

means for loading jobs on to servers; said request managing means being arranged to receive requests from the clients and, on receiving a request from a client to run job which is destined for a resource accessed by a server, to perform the following operations;

check is the resource is free to run the job; and
if the resource is not free, put the job on a queu

for jobs each of which is waiting for a resource to becom

free.

- 10. A network manager for managing at least one element c a telecommunications network, said network manager including a computer system as claimed in any one of the precedical claims.
- 11. A method of operating a computer system having client-server architecture, said computer system comprisi a set of clients and a set of servers for serving reques from the clients to run jobs, for each request made by client to run a job on a server, said method comprising t steps of:

checking if a server is free to run the job; and

if a server is not free to run the job, putting t

job on a queue for jobs each of which is ready for executi

when a server becomes and

when a server is free to run the job, loading a job to the server.

12. A method of operating a computer system as claimed claim 11, in which the method includes the step of select the next job to be loaded onto a free server in accorda with a predefined criterion.


30


13. A method of operating a computer system as claimed in claim 11 or claim 12 in which, for each request to run a job on a server, said method including the additional steps of:

checking if the job is scheduled for execution at a 5 time in the future; and

if the job is scheduled for execution at a time in the future, putting the job on a queue for jobs each of which is scheduled for execution at a time in the future.


- 10 14. A method of operating a computer system as claimed in claim 11, claim 12 or claim 13 in which, for each request to run a job which is destined for a resource accessed by a server, the method includes the following additional steps:
- checking if the resource is free to run the job; and
 if the resource is not free, putting the job on a
 queue for jobs each of which is waiting for a resource to
 become free.
- 15. A method of operating a computer system having a client-server architecture, said computer system having a set of clients and a set of servers for serving requests from the clients to run jobs, for each request made by a client to run a job on a resource accessed by a server, said method including the steps of:
- checking if the resource is free to run the job; and if the resource is not free, putting the job on a queue for jobs each of which is waiting for a resource to become free.

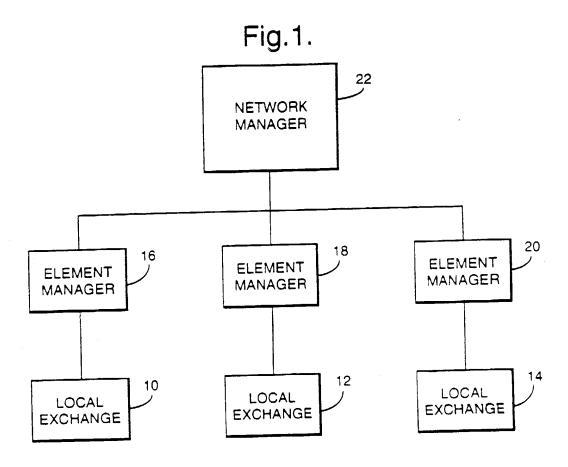

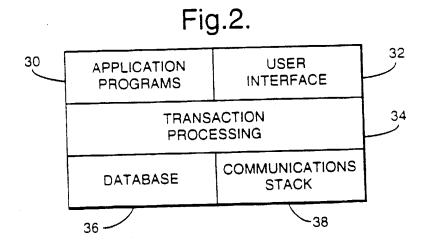


SUBSTITUTE SHEET (RULE 26)


2/6

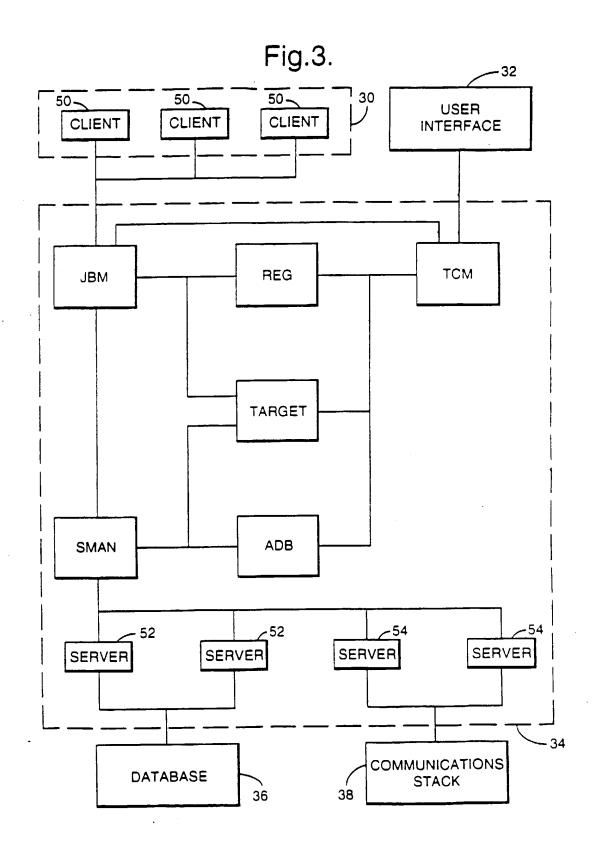



SUBSTITUTE SHEET (RULE 26)

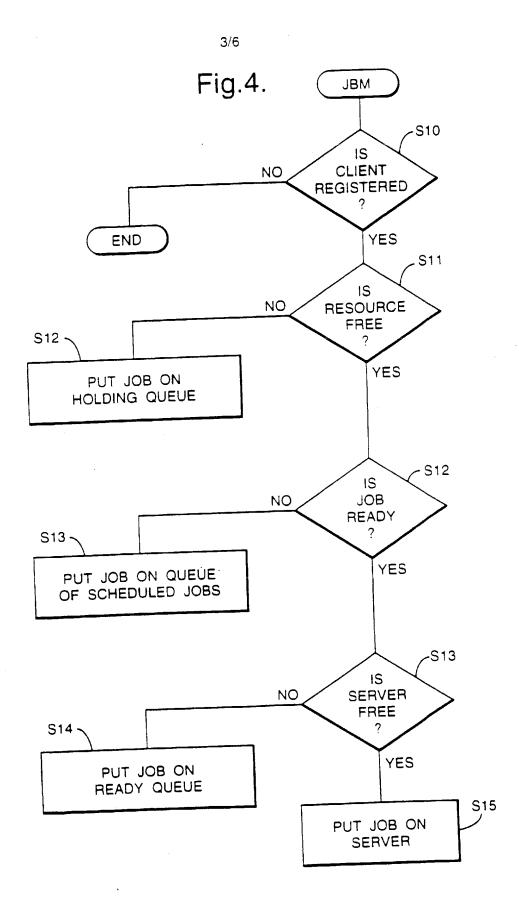


SUBSTITUTE SHEET (RULE 26)

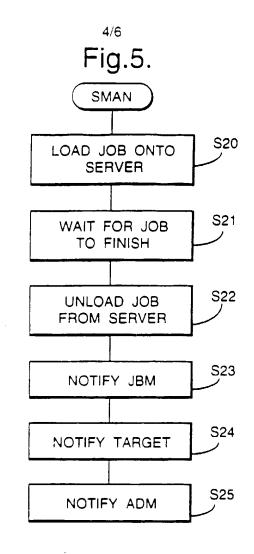

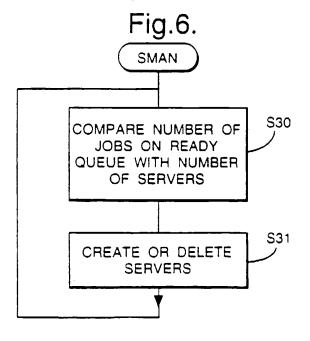

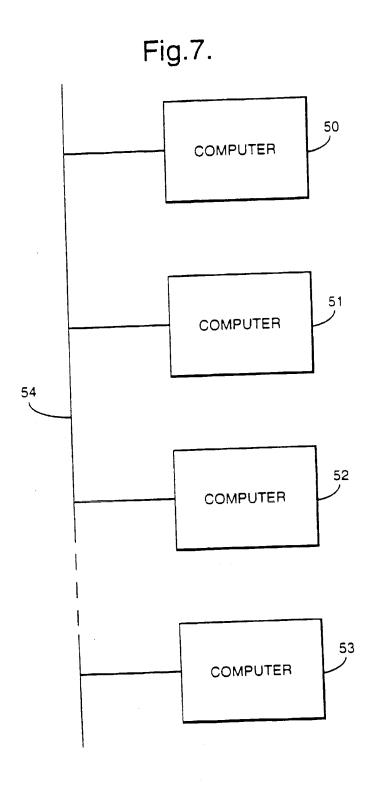

SUBSTITUTE SHEET (RULE 26)

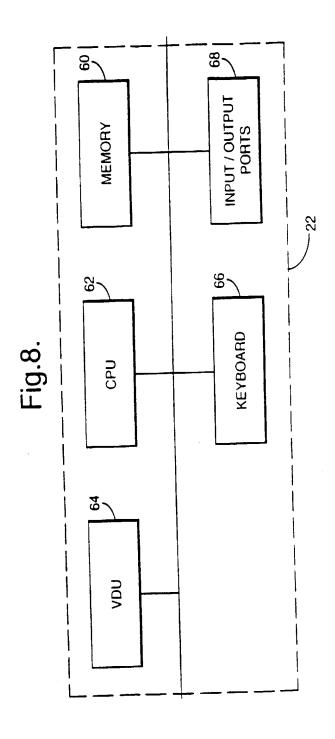

SUBSTITUTE SHEET (RULE 26)

INTERNATIONAL SEARCH REPORT . Application No inema PCT/GB 95/01705 A. CLASSIFICATION OF SUBJECT MATTER
IPC 6 GO6F9/46 According to International Patent Classification (IPC) or to both national classification and IPC B. FIELDS SEARCHED Minimum documentation searched (classification system followed by classification symbols) G06F IPC 6 Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched Electronic data base consulted during the international search (name of data base and, where practical, search terms used) C. DOCUMENTS CONSIDERED TO BE RELEVANT Relevant to dam No. Clasion of document, with indication, where appropriate, of the relevant passages Category * 1-15 US,A,5 249 290 (HEIZER) 28 September 1993 X see the whole document 1-4,9-15 US,A,5 325 527 (CWIKOWSKI ET AL.) 28 June X 1994 A see the whole document 1-15 EP,A,O 601 579 (MITSUBISHI) 15 June 1994 see the whole document 1-15 EP,A,O 384 339 (DIGITAL) 29 August 1990 see abstract see column 1 - column 4
see column 12, line 13 - column 15, line
11; figures 1-7 see claims 1-28 -/--Patent family members are listed in annex. Further documents are listed in the continuation of box C. X X To later document published after the international filing date or priority date and not in conflict with the application but died to understand the principle or theory understand the * Special categories of cated documents: "A" document defining the general state of the art which is not considered to be of particular relevance UNIVERSE CO. "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to earlier document but published on or after the international filing date ·L ·o ·P D

1

e carrier detection of the filing date L' document which may throw doubts on priority claim(s) or which is died to establish the publication date of another claim or other special reason (as specified) O' document referring to an oral disclosure, use, exhibition or other means P' document published prior to the international filing date but later than the priority date claimed	cannot be commented by the the document is taken alone involves in inventive step when the document is taken alone cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person shilled in the art. '&' document member of the same patent family
Date of the actual completion of the international search	Date of mailing of the international search report
18 October 1995	1 0. 11. 95
the ISA	Authorized officer
Name and mailing address of the ISA European Patent Office, P.B. 5818 Patentiaan 2 NL - 2280 HV Ruswilk Tel. (+31-70) 340-2040, Tx. 31 651 epo nl. Fax: (+31-70) 340-3016	Wiltink, J
Fac (+ 31-10) 3-2-2-1	

Form PCT/ISA/210 (second sheet) (July 1992)

INTERNATIONAL SEARCH REPORT

PCT/GB 95/01705

C.(Conanu	MON) DOCUMENTS CONSIDERED TO BE RELEVANT	PC1/GB 95/01/05		
	Citation of document, with indication, where appropriate, of the relevant passages	Reinvant to claim No.		
Ā	MICROPROCESSING AND MICROPROGRAMMING, vol. 12, no. 3/4, October 1983, AMSTERDAM, NL, pages 159-166, A. CORRADI ET AL.: 'Using the iAPX-432 System as a Support for Chill Parallel Constructs' see page 160, left column, line 9 - page 161, left column, line 22	1,2,4,9,		
A	HEWLETT-PACKARD JOURNAL, vol. 41, no. 2, April 1990 , US, pages 54-59, K.S. KLEMBA ET AL.: 'HP OpenView Network Management Architecture' see figures 1,4	10		
•				
	·			

1

INTERNATIONAL SEARCH REPORT

Information on patent family members

Intern. al Application No PCT/GB 95/01705

Patent document cited in search report	Publication date	Patent i memb		Publication date
US-A-5249290	28-09-93	NONE		
US-A-5325527	28-06-94	JP-A-	6301619	28-10-94
EP-A-0601579	15-06-94	JP-A- G8-A-	6282516 2273378	07-10-94 15-06-94
EP-A-0384339	29-08-90	AU-B- AU-B- AU-B- AU-B- CA-A- JP-A- US-A-	611605 4996190 630291 7603391 2010762 3116262 5341477	13-06-91 13-09-90 22-10-92 15-08-91 24-08-90 17-05-91 23-08-94

Form PCT/ISA/218 (potent family ennex) (July 1992)